

STANDARD FEATURES:

OPTIONAL FEATURES:

OUTDOOR UNITS
Up to 180,000 CFM

Cabinet

- 18 ga G-90 pre-painted galvanized
- 2" double wall construction
- 1.5" R 9.6 insulation
- 22 ga SS 304 double wall
- All door mechanical safety locks
- 4" double drainable louvers
- Thermal break aluminum frames
- Structural 16 ga floor
- Anti-slip 16 ga floor
- Discharge motorized damper
- Single unit

- 16 ga casing
- SS 304 cabinet
- SS 304 base frame
- Aluminum cabinet
- 2" R 13.1 insulation
- 4" motorized drain louver
- Two stack unit

Fans & Motors

- Plenum fan array
- Ec Motors
- Fan guard
- Bacnet motor interface

- Modbus motor ininterface
- PWM motor control
- AC motor with VFD

Cooling Media

- Cooling coil (DX/CHW)
- SS 304 drain pan
- Control valves
- Cooper piping
- Drain pump

- SS 304 coil frame
- 12" CELdek evap section
- Vitaulic pipe connection
- Mist eliminator
- 12" Glasdek evap section
- Modulating humidity controls

Electrical


- Pre-wired to a single point connection
- Internal lights
- Temperature sensors
- Water leak detector
- Pressure switch

- Automatic flush for evap section
- Fan door safety disconnect switches
- Smoke detectors

Filters

- 2" Aluminum pre-filters
- 2" MERV 8 pleated filters

- 4" MERV 10, 11 or 14 filters
- 14" badig filters
- Hepa filters

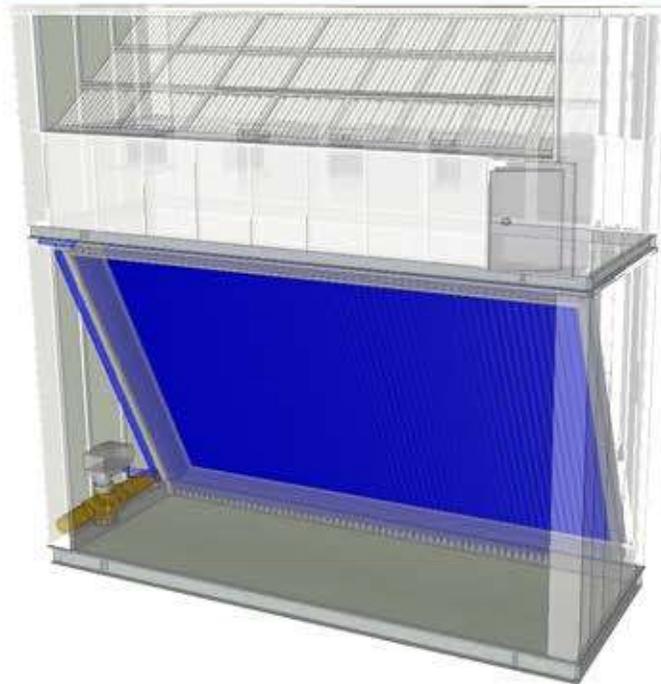

STANDARD FEATURES:

OPTIONAL FEATURES:

INDOOR UNITS
Up to 60,000 CFM

Cabinet

- ° 18 ga G-90 pre.painted galvanized
- ° 2" double wal construction
- ° 1.5" R 9.6 insulation
- ° 22 ga SS 304 double wall
- ° All doors mechanical safety locks
- ° Thermal break aluminum frames
- ° Structural steel base
- ° Discharge motorized damper

- ° 16 ga casing
- ° SS 304 cabinet
- ° SS 304 base frame
- ° Aluminum cabinet
- ° 2" R 13.1 insulation

Fans & Motors

- ° Plenum fan array
- ° Ec Motors
- ° Bacnet motor interface

- ° Modbus motor interface
- ° PWM motor control
- ° AC motor with VFD

Cooling Media

- ° Cooling coil (DX/CHW)
- ° SS 304 drain pan
- ° Control valves
- ° Cooper piping
- ° Drain pump

- ° SS 304 coild frame
- ° Vitaulic pipe connection

Electrical

- ° Pre-wired to a single point connection
- ° internal lights
- ° Temperature sensors
- ° Water leak detector
- ° Pressure switch

- ° Fan door safety disconnect
- ° Smoke detectors

Filters

- ° 2" MERV 8 pleated filters

- ° 4" MERV 10, 11 or 14 filters

CUSTOM MADE THE BEST SOLUTION